



Divina Melange 3
Designed by Finn Sködt

Application Offices, hotels, institutions, domestic use.
Description 100% new wool. Width app. 59 inches (150 cm). Weight app. 840 g/lin.m. Piece dyed. Colour differences may occur.
Selvedge ↔
Abrasion: App. 45,000 rubs acc. to the Martindale method EN ISO 12947. **Lightfastness** (ISO) 5-7. **Pilling** (EN ISO) 3. **Fastness to rubbing** (ISO) dry 4-5, wet 4. **Sound absorption** (EN ISO 354) 0.60/Class C (flat), 0.70/Class C (waved). **Airflow** 678 Pa s/m. **Flame resistance:** AS/ NZS 1530.3. BS 5852 Crib 5. BS 5852 ignition source 3. BS 5852 Part 1. BS 5867 Part 2 Type B. EN 1021-1/2. EN 13501, C-s1, d0. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ÖNORM B1 / Q1. (Copy of test report available).
Care Please see the ISO symbols. Iron without steam.

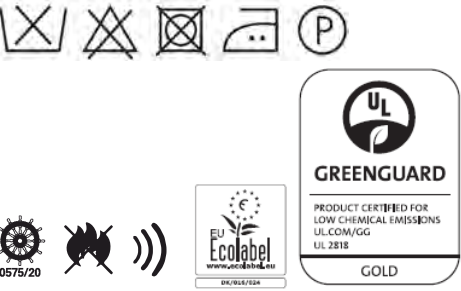

Steelcut Trio 3
Designed by Frans Dijkmeijer and Giulio Ridolfo

Application Offices, hotels, institutions, domestic use. Great durability.
Description 90% new wool, worsted, 10% nylon. Width app. 55 inches (140 cm). Weight app. 770 g/lin.m. Yarn dyed. Colour differences may occur.
Selvedge ↕
Abrasion: App. 100,000 rubs acc. to the Martindale method EN ISO 12947. **Lightfastness** (ISO) 5-7. **Pilling** (EN ISO) 4. **Fastness to rubbing** (ISO) dry 4-5, wet 3-5. **Flame resistance:** EN 1021-1/2. BS 5852, part 1. DIN 4102 B2. ÖNORM B1/Q1 NF D 60 013. UNI 9175 11M. US Cal. Bull. 117-2013. NFPA 260. AS/NZS 3837 Class 2. IMO FTP Code 2010:Part 8. Crib 5 and SN 198 898 5.3 when flame protected (Copy of test report available).
Care Please see the ISO symbols.

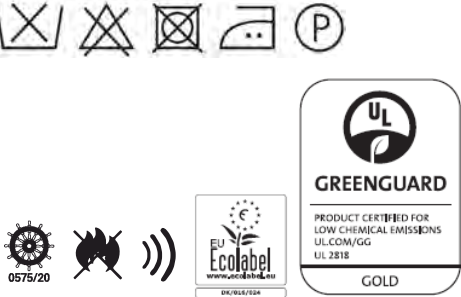

Melange Nap
Designed by Akira Minagawa

Application Offices, hotels, institutions, domestic use. Great durability.
Description 97% new wool, worsted, 3% nylon. Width app. 55 inches (140 cm). Weight app. 440 g/lin.m. Material dyed. Colour differences may occur.
Selvedge ↕
Abrasion: App. 60,000 rubs acc. to the Martindale method EN ISO 12947. **Lightfastness** (ISO) 6. **Pilling** (EN ISO) 3-4. **Fastness to rubbing** (ISO) dry 4-5, wet 4-5. **Sound absorption** (EN ISO 354) 0.55/Class D (flat), 0.80/Class B (waved). **Airflow** 521 Pa s/m. **Flame resistance:** AS/ NZS 3837 Class 2. BS 5852 Crib 5 with treatment. BS 5852 ignition source 3. BS 5852 Part 1. EN 1021-1/2. IMO FTP Code 2010:Part 8. NF D 60 013. UNI 9175 11M. US Cal. Bull. 117-2013. (Copy of test report available).
Care Please see the ISO symbols.



Divina Melange 3
Melange Nap
Steelcut Trio 3




Martin
/ Brattrud


kvadrat



Divina Melange 3 871




Steelcut Trio 3 996



Divina Melange 3 821




Melange Nap 911



Steelcut Trio 3 124



Divina Melange 3 147



Steelcut Trio 3 133



Steelcut Trio 3 226



Steelcut Trio 3 105



Divina Melange 3 227



Divina Melange 3 427



Melange Nap 411



Melange Nap 711



Steelcut Trio 3 713



Divina Melange 3 731



Melange Nap 321




Divina Melange 3 547




Melange Nap 171



Steelcut Trio 3 533



Melange Nap 651



Divina Melange 3 170




Melange Nap 521



Steelcut Trio 3 176



Steelcut Trio 3 383



Divina Melange 3 180